

# FORCE SENSITIVE RESISTOR (FSR)

## SHUNT Mode

# FRX7SO

## Datasheet

### Features


- Wide dynamic pressure sensing
- Flexible and lightweight
- Ultra-thin
- Instant responding sensitivity
- Low actuation force
- Low power consumption
- Cost-effective
- Robust
- Easy to integrate



**FRX7SO**  
Force sensitive resistor - Shunt mode

**CERADEX**

### Technical specifications

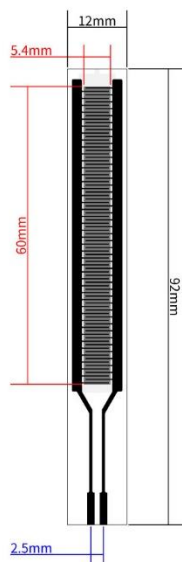

Technical dimension

**FRX7SO**  
Force sensitive resistor - Shunt mode

**CERADEX**

Sensor	FRX7SO
Length	92mm
Width	12mm
Active area	60mm x 5.4mm
Pin spacing	2.5mm
Nominal thickness	0.33mm
Substrate	PET
Sensor style	Open
Connector	2-pin male solder tabs
Thickness	0.73mm
Width	1.6mm

**Note:** Ceradex offer customize sensor solution for application-specific integration. Including the sensor's dimension, single-zone or multi-zone sensing area, connector options, waterproofs, humidity tolerance, and heat tolerance. Contact us for more information.

## Characteristics

Sensor type	Shunt mode
Force sensing range	200 g – 10 kg
Actuation force	≤ 200 g
Force resolution	Continuous (analog)
Force repeatability	Single part ± 2%
Non-actuated resistance	> 10M Ω (Ohm)
Response time	< 40 ms
Operation temperature	-20°C - +60°C


## Durability

Tap durability	1kg/1Hz	> 10M actuation
Standing load durability	2.5kg/24hr	< 5%
Operating temperature performance		
Cold	-40°C/1hr	< 5%
Hot	+60°C/1hr	< 15%
Storage temperature performance		
Cold	-40°C/1hr	< 10%
Hot	+60°C/1hr	< 15%


## Safety

Maximum driving power	< 240mW
Electromagnetic interference (EMI)	No
Electrostatic discharge (ESD)	No

## Response curve

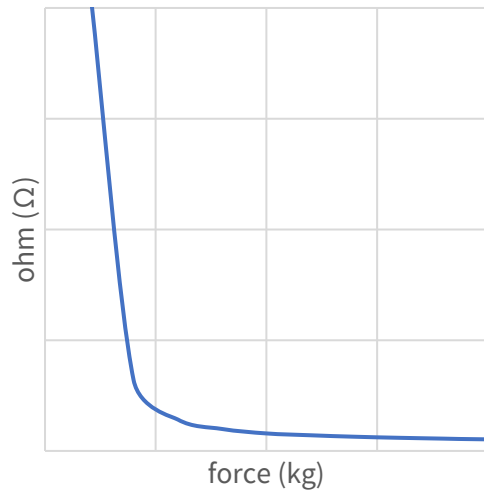

## Electrical layout

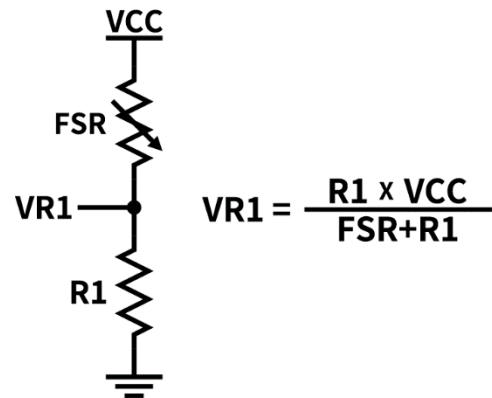

**Note:** Force sensing range, response curve, and actuation force can be modified in Ceradex's customized sensor solution.

## Applications

### Grips applications

Sportwear grips/steering wheel/game controller pressure detection and monitoring.

### Occupancy detection

Seat/bed occupancy indicator for safety and monitoring.

### User Interface

Can be operated under glove-wearing conditions and detects touch/press control as switches and keypads.

### Biomedical pressure analysis

Can be used in wearable devices such as foot sensing and posture analysis.

**CERADEx**
**Ceradex Corporation**

Tel : +886 3 365-6878

Fax : +886 3 365-6879

Mail : salesdpt@ceradex.com.tw

Add : No.1, Ruiyuan 1<sup>st</sup> St., Bade Dist., Taoyuan City 33447, Taiwan